

Lifting Eye APS

Product information

Advantages:

- Compact design
- Secured four times against breakage
- D-link swings 180°
- Weld-on shackle made of material S355JR according to EN 10025
- Also loadable transversely to the swivel direction

Material: Eye of alloy steel. Welding attachment of steel St 52.

Marking: CE-marked, WLL.

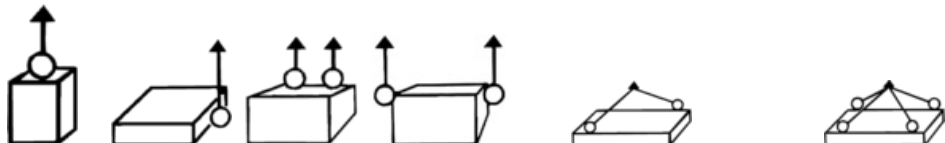
Finish: Painted.

Note: The surface that the lifting eyes shall be attached to shall be flat and tolerate the load it is going to be exposed to.

Safety factor: 4:1

Part Code	Code	WLL ton	a mm	b mm	c mm	ø d mm	e mm	f mm	l mm	Weight kg	Delivery time
4215381701000	TAPS 1	1.12	32	38	32	13	25	70	42	0.32	7
4215381702000	TAPS 2	2	34	40	34	14	26	72	42	0.33	7
4215381703000	TAPS 3	3.15	47	56	50	18	36	92	54	0.84	7
4215381705000	TAPS 5	5.3	55	67	60	22	46	111	63	1.56	7
4215381708000	TAPS 8	8	68	80	68	26	54	127	68	2.62	7
4215380415000	TAPS 15	15	82	125	100	30	60	190	120	5.4	7

Technical data

kind of attachment								
	1	1	2	2	2		3 o. 4	
number of piece	1	1	2	2	2	2	3 o. 4	3 o. 4
inclination angle	0°	90°	0°	90°	0°-45°	45°-60°	0°-45°	45°-60°
Code	WLL ton							
	t	t	t	t	t	t	t	t
TAPS 1	1,60	1,12	3,20	2,24	1,50	1,12	2,36	1,60
TAPS 2	3,00	2,00	6,00	4,00	2,80	2,00	4,00	3,00
TAPS 3	4,75	3,15	9,50	6,30	4,25	3,15	6,30	4,75
TAPS 5	8,00	5,30	16,00	10,60	7,10	5,30	11,20	8,00
TAPS 8	12,00	8,00	24,00	16,00	11,20	8,00	16,00	12,00
TAPS 15	22,40	15,00	45,00	30,00	21,20	15,00	31,50	22,40
TAPS 20	30,00	20,00	60,00	40,00	30,00	20,00	40,00	30,00
TAPS 25	37,50	25,00	75,00	50,00	33,50	25,00	50,00	37,50
TAPS 30	45,00	30,00	90,00	60,00	45,00	30,00	63,00	45,00
TAPS 35	50,00	35,00	100,00	70,00	47,50	35,00	70,00	50,00
TAPS 40	60,00	40,00	120,00	80,00	56,00	40,00	80,00	60,00
TAPS 50	71,00	50,00	142,00	100,00	70,00	50,00	100,00	71,00
TAPS 63	75,00	63,00	150,00	126,00	90,00	63,00	132,00	95,00

Blueprint

