


## Steel Wire Rope 6x36WS-FC

### Product information



ISO 4309 Rope Category No: RCN.09

... [Read more](#)

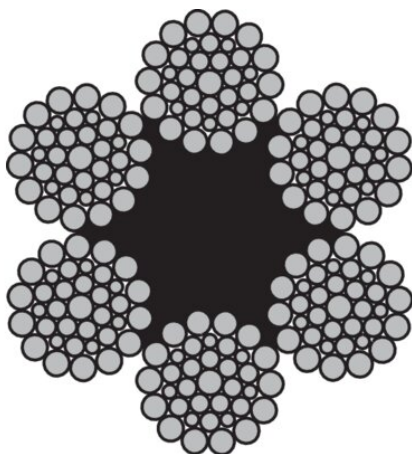


**Rope construction:** 6x36WS-FC  
**Marking:** According to standard  
**Standard:** EN 12385-4

**Fill factor:** 0.5  
**RCN:** 09

Slings



Overhead cranes



## Steel Wire Rope 6x36WS-FC

### Technical data

Part code	Rope diameter	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
101100803270341	8	1,960	Galvanized	zS	41.4	25.2	A-1	24
101100904270341	9	1,960	Galvanized	sZ	52.4	31.8	A-1	30
101101004270341	10	1,960	Galvanized	sZ	64.7	39.3	A-1	37
101101104270341	11	1,960	Galvanized	sZ	78.3	47.6	A-1	44
101101204270341	12	1,960	Galvanized	sZ	93.1	56.6	A-1	53
101101203270341	12	1,960	Galvanized	zS	93.1	56.6	A-1	53
101101304270341	13	1,960	Galvanized	sZ	109	66.4	A-1	62
101101404250341	14	1,770	Galvanized	sZ	114	77	A-1	72
101101604270341	16	1,960	Galvanized	sZ	166	101	A-1	94
101101804270341	18	1,960	Galvanized	sZ	210	127	A-1	119
101101904270341	19	1,960	Galvanized	sZ	233	142	A-1	132
101102003250341	20	1,770	Galvanized	zS	234	157	A-1	147
101102004270341	20	1,960	Galvanized	sZ	259	157	A-1	147
101102204270341	22	1,960	Galvanized	sZ	313	190	A-1	178
101102203270341	22	1,960	Galvanized	zS	313	190	A-1	178
101102403250341	24	1,770	Galvanized	zS	336	226	A-1	211
101102404270341	24	1,960	Galvanized	sZ	373	226	A-1	211
101102604270341	26	1,960	Galvanized	sZ	437	266	A-1	248
101102804270341	28	1,960	Galvanized	sZ	507	308	A-1	288
101103003250341	30	1,770	Galvanized	zS	526	354	A-1	330
101103004270341	30	1,960	Galvanized	sZ	582	354	A-1	330
101103203250341	32	1,770	Galvanized	zS	598	402	A-1	376
101103204270341	32	1,960	Galvanized	sZ	662	402	A-1	376
101103603250341	36	1,770	Galvanized	zS	757	509	A-1	476
101103603270341	36	1,960	Galvanized	zS	838	509	A-1	476
101103803250341	38	1,770	Galvanized	zS	843	567	A-1	530
101104004270341	40	1,960	Galvanized	sZ	1,035	629	A-1	587