Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa B 50

Product information

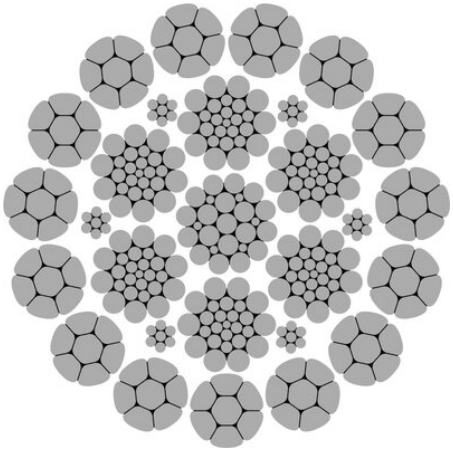

- Rotation poor.
- Compact outer threads.
- High breaking strength

... *Read more*

Marking: According to standard
Standard: EN 12385-4

Fill factor: 0.7145

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa B 50

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104100504070309	5	1,960	Bright	sZ	23	SupplierStandard	12
104100704050309	7	1,770	Bright	sZ	40.6	SupplierStandard	24
104100754070309	7.5	1,960	Bright	sZ	51.7	SupplierStandard	27
104101004300309	10	2,160	Galvanized	sZ	98.6	SupplierStandard	49
104101404270309	14	1,960	Galvanized	sZ	181	SupplierStandard	95
104101604300309	16	2,160	Galvanized	sZ	256	SupplierStandard	126
104106504300309	65	2,160	Galvanized	sZ	4,174	SupplierStandard	2,051

© November 2026 - All Rights Reserved