
Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa H50

Product information

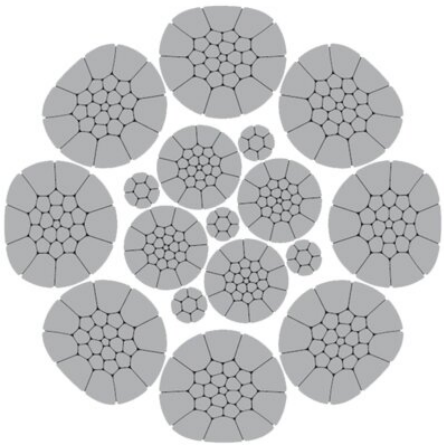

- Non-rotation resistant.
- Compact outer threads.
- Compact rope.
- Extremely high breaking strength.
- Use without rope swivel.

... *Read more*

Marking: According to standard
Standard: EN 12385-4

Fill factor: 0.7660

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa H50

Technical data

Part code	Rope diameter	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104102203250290	22	1,770	Galvanized	zS	440	-	262
104102204250290	22	1,770	Galvanized	sZ	440	-	262
104103004300299	30	2,160	Galvanized	sZ	983	SupplierStandard	487
104103203300299	32	2,160	Galvanized	zS	1,118	SupplierStandard	554

© November 2026 - All Rights Reserved