

## Double Swivel Ring Codipro OS DSR UP UNC

---

### Product information



**Standard metric and UNC threads available**

**M 5 to M 42**

WLL 0.07 ton to 9.00 ton

**UNC 1/4" to UNC 1" 1/4**

WLL 330 lbs to 13,500 lbs

- Swing under load 360° rotation - 180° swing.
- Complies with Machinery Directive 2006/42/CE.
- Produced in accordance with the EN 1677-1 standard.
- Safety factor 4:1 and 5:1.

[... Read more](#)


---

**Marking:** CE-marked, Individual marking

**Safety factor:** 5:1

## Double Swivel Ring Codipro OS DSR UP UNC

### Blueprint

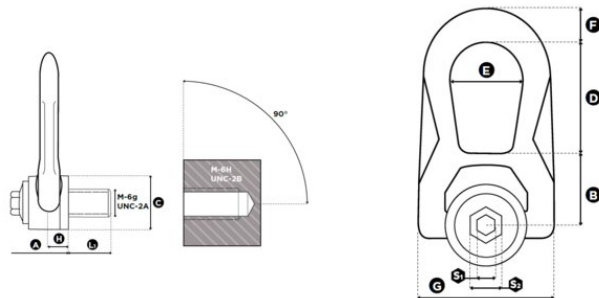

### Technical data

Part code	WLL ton	Thread Inch	Torque Nm	A mm	B mm	C mm	D, mm	E mm	F mm	G, mm	H, mm	L1mm mm	S1 mm mm	S2 mm mm	Weight kg
4215OSDSRU050UP	0.6	UNC 3/8"-16	8	32	30	30	38	27	14	53	9.5	17	8	16	0.3
4215OSDSRU075UP	2.4	UNC 3/4"-10	80	45	40	45	53	38	17	76	13	30	8	20	0.9