


## Drako 8x19S-FC

### Product information

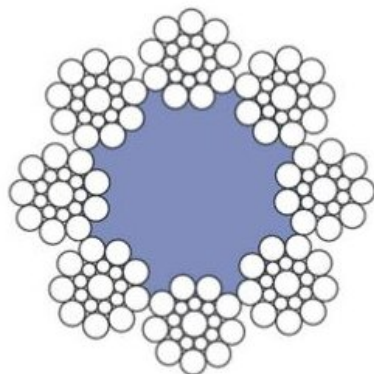

SZ

The rope construction 8 x 19 Seale, see drawing, is without doubt the worldwide most common traction drive suspension rope.

This rope is successfully used in diameters up to 13mm as a governor rope.

Anyway, 8-strand ropes with natural fibre core is the most common solution for the normal traction drive elevator.

The rope quality of this rope construction depends on the quality of the fibres and the resulting fibre core. This is the reason, why DRAKO is only using DRAKO-made fibre cores.

- rounder than 6-strand ropes, i.e. more contact points rope to groove
- deformable in cross-section, i.e. the new rope adapts a little bit to slightly worn out grooves
- easy to install

**Rope construction:** 8x19S-FC

**Marking:** According to standard

**Standard:** EN 12385-5

Part Code	Rope Diameter	Tensile strength N/mm <sup>2</sup>	Min. Breaking force kN.	Finish	Weight kg/100m	Delivery time
106100654020309	6.5	1,570	19	Bright	14.6	3
106100804130309	8	1370/1770	30.4	Bright	21.5	3
106100904130309	9	1370/1770	38.4	Bright	27.3	3
106101004130309	10	1370/1770	47.4	Bright	33.7	3
106101104130309	11	1370/1770	57.4	Bright	40.7	3
106101204130309	12	1370/1770	68.3	Bright	48.5	3
106101304130309	13	1370/1770	80.2	Bright	56.9	3
106101504130309	15	1370/1770	107	Bright	75.7	3
106101604130309	16	1370/1770	121	Bright	86.1	3