



Wire rope Dyform 34LR

Product information

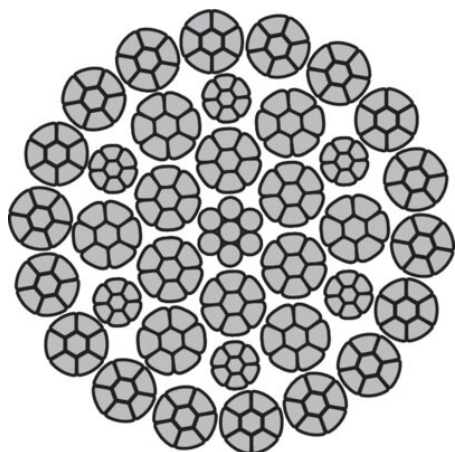

Very Low Rotation.

Superior bending fatigue life when compared with conventional low rotation ropes. Excellent resistance to crushing and abrasion particularly on multi layer drums resulting from the compacted strands.

Reduced elongation results from increased steel content and the Dyform process.

ISO 4309 Rope Category No: 10-40mm **RCN.23-2**, 42-76mm **RCN.31**

... [Read more](#)

Features: Extremely strong low rotation Crane Hoist Rope.

Material: High Carbon Steel

Marking: According to standard, CE-marked, On Termination ID

Finish: Galvanised or Ungalvanised

Standard: EN 12385-4

Fill factor: 0.76

RCN: 23-2

Wire rope Dyform 34LR

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104112606270259	126	1,960	Galvanized	zZ	13,249	8,674	SupplierStandard	7,752
104112806270259	128	1,960	Galvanized	zZ	13,141	8,956	SupplierStandard	8,009