


## Kiswire Neptune 6x49WS+IWRC

### Product information

zS sZ G

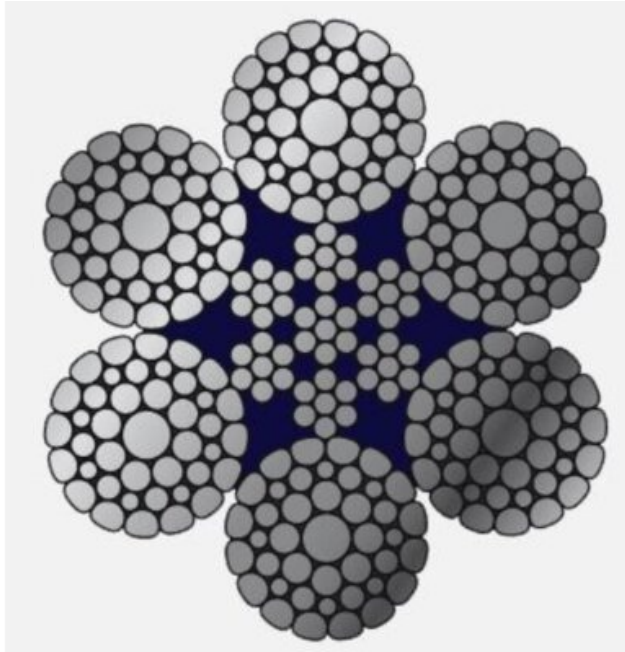

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
109808304270322	83	1,960	Galvanized	sZ	5,464	3,590	A-2	2,990
109808604270322	86	1,960	Galvanized	sZ	5,180	3,590	A-2	3,220
109808754250322	87.5	1,770	Galvanized	sZ	4,775	3,590	A-2	3,220
109809003270322	90	1,960	Galvanized	zS	6,867	3,890	A-2	3,480
109809404250329	94	1,770	Galvanized	sZ	6,896	4,400	SupplierStandard	3,760
109809604270329	96	1,960	Galvanized	sZ	6,867	3,850	SupplierStandard	3,990
109809804250329	98	1,770	Galvanized	sZ	7,367	4,800	SupplierStandard	4,120
109810004270329	100	1,960	Galvanized	sZ	8,201	5,400	SupplierStandard	4,790