

Wire Rope Clip Crosby G-429

Product information




- Entire clip is Galvanized to resist corrosive and rusting action.
- Based on the catalog breaking strength of wire rope, Crosby wire rope clips have an efficiency rating of 80% for 3/16" - 7/8" sizes, and 90% for sizes 1" through 1-1/2".
- Bolts are an integral part of the saddle. Nuts can be installed in such a way as to enable the operator to swing the wrench in a full arc for fast installation.
- All sizes have forged steel saddles.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these wire rope clips meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Assembled with standard heavy hex nuts.

... [Read more](#)

Marking: All Clips are individually bagged or tagged with proper application instructions and warning information.

Wire Rope Clip Crosby G-429

Blueprint

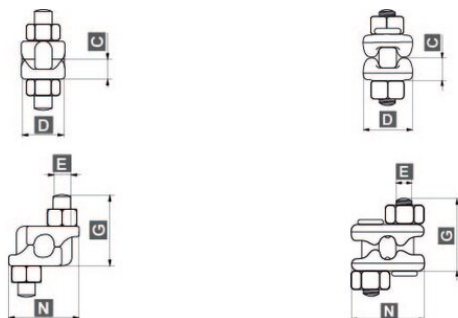

Technical data

Part code	Rope Ø range mm	C mm	D mm	E mm	G, mm	Nmm mm	Weight kg/100pc
121100700170	5-7	10.2	23.9	9.65	32.5	36.6	10.4
121102200170	22	24.6	53.8	19.1	84	72.6	102
121104000170	36-40	39.6	76	25.4	141	105	318