


Steel wire rope Diepa H40 (SKZ8), non-rotation resistant.

Product information

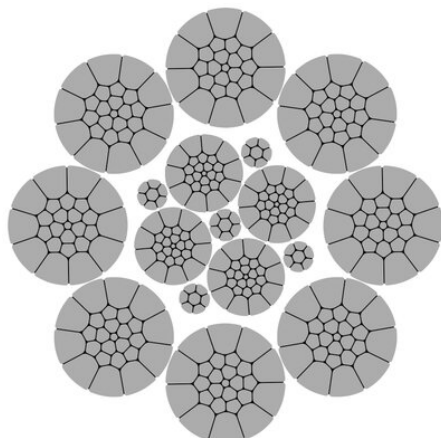

General: Diepa H40 is a non-rotation resistant wire rope with compacted inner and outer strands. The rope has a very high breaking force.

Applications: Jib adjusting rope. Jib retaining rope.

Lay: Ordinary lay

Total number of wires: 4-6mm 95, 7-15mm 262, 16-24mm 319, 25-44mm 347, 45-64mm 427, 65-76mm 487

ISO 4309 Rope Category No: 4-6mm **RCN.02**, 7-15mm **RCN.04**, 16-44mm **RCN.09**, 45-76mm **RCN.13**

... [Read more](#)

Marking: According to standard

Finish: Galvanized or bright.

Standard: EN 12385-4

Warning: Not to be used with a swivel.

Fill factor: 0.7403

RCN: 02

Steel wire rope Diepa H40 (SKZ8), non-rotation resistant.

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
103102804070219	28	1,960	Bright	sZ	747	-	SupplierStandard	-
103103004270219	30	1,960	Galvanized	sZ	860	-	SupplierStandard	-
103103204270219	32	1,960	Galvanized	sZ	979	-	SupplierStandard	-
103103203270219	32	1,960	Galvanized	zS	979	-	SupplierStandard	-
103105404270219	54	1,960	Galvanized	sZ	2,768	-	SupplierStandard	-