


Mobile Man Anchor IM 200

Product information

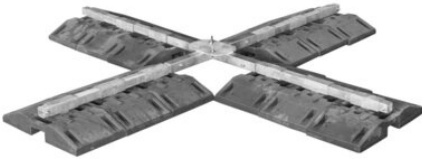

Portable anchor mass for fall protection on flat roofs with sufficient load capacity. It uses a hot-dip galvanized steel main cross as the attachment point together with 12 rubber weights, creating a temporary anchorage solution without a permanently installed anchor point. IM 200 can be used on the following types of surface Bitumen and PVC membrane.

Best used for:

- Temporary anchorage on flat roofs with sufficient load-bearing capacity.
- Applications requiring a portable anchor point for up to two users.

Product benefits:

- Conforms to EN 795 Type E for deadweight anchorage applications.
- Supports connection for a maximum of two users.
- Hot-dip galvanized steel construction provides corrosion protection.
- Suitable for use in explosion-hazard zones.

[... Read more](#)

Material: Steel, rubber

Marking: According to standard

Standard: EN 795 E

Mobile Man Anchor IM 200

Technical data

Part code	Max. number of persons	Dimensions mm	Weight kg
825300200350	2	740 x 320 x 208	367